

Forklift Jibs - FMJ



The Fork Mounted Jib (FMJ) is a fixed length jib which mounts onto the forks of the fork truck. The ideal attachment for lifting and conveying loads which are not suitable for, or do not require palletising.

Supplied with hook and shackle which can be moved to any of the four suitable lifting positions

Lifting Capacity (kg) at Load Centre (mm)

| Model Ref | Minimum Truck Capacity (kg) | 1000 | 1250 | 1500 | 1750 |
|-------------|-----------------------------|------|------|------|------|
| FMJ 500-0.8 | 1000 | 500 | 380 | 310 | 230 |
| FMJ 500-1.0 | 1300 | 630 | 470 | 388 | 280 |
| FMJ 500-1.3 | 1500 | 680 | 500 | 450 | 380 |
| FMJ 500-1.8 | 2000 | 1100 | 900 | 720 | 580 |
| FMJ 500-2.2 | 2500 | 1400 | 1100 | 1000 | 830 |
| FMJ 500-2.7 | 3000 | 1450 | 1200 | 1100 | 900 |
| FMJ 500-3.1 | 3500 | 1900 | 1500 | 1200 | 1000 |
| FMJ 500-3.5 | 4000 | 2000 | 1600 | 1300 | 1100 |
| FMJ 500-4.4 | 5000 | 2700 | 2200 | 1850 | 1400 |

Features & Benefits

- Raised hook position for improved visibility whilst keeping hook off the ground when left standing
- Jib rated to suit the capacity of the lift truck, which helps to reduce wear & tear and possible over-loading
- Multiple hook positions for flexible load handling whilst reducing handling costs
- Long jib arm helps reach otherwise inaccessible places
- Heel retaining pins ensures jib is safely secured to the forklift forks
- CE marked and supplied with certificate of conformity for health & safety regulations




LIFTTRUCK
ATTACHMENTS

Albert Einsteinweg 5
NL-5151 DK
Drunen

Tel: +31(0)73- 640 00 52
www.ltabenelux.com
info@ltabenelux.com

Forklift Jibs - 'FMJ' Range

Jib Dimensions

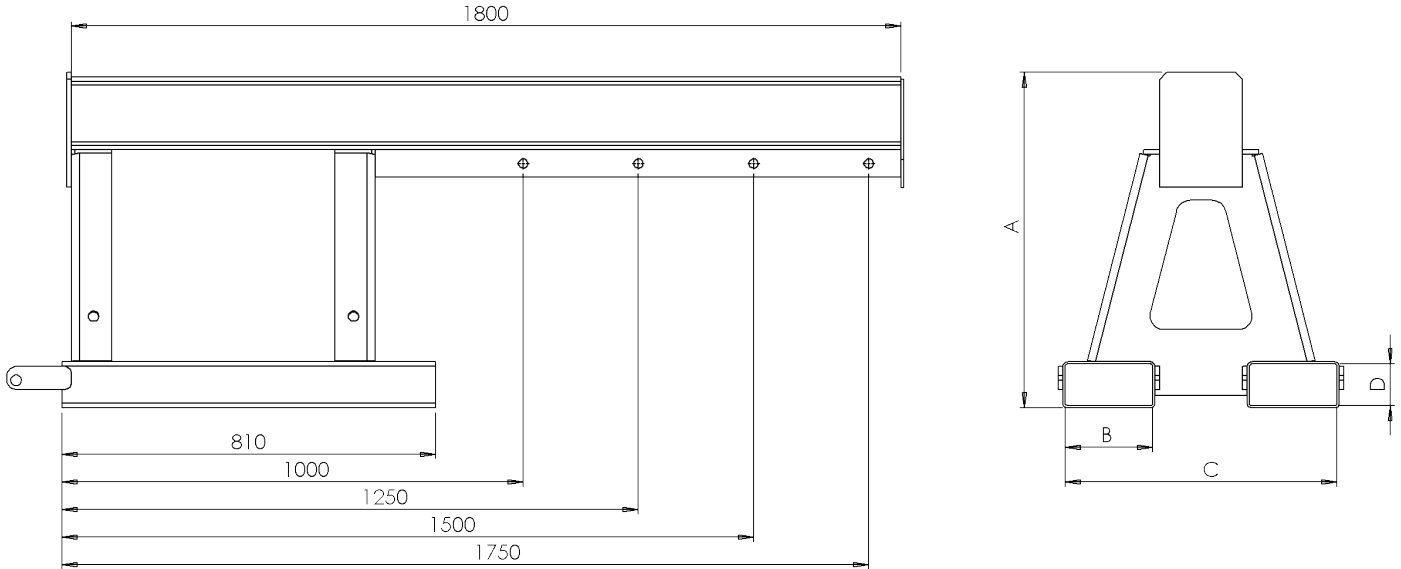

| Model Ref | "A" (mm) | "B" (mm) | "C" (mm) | "D" (mm) | Weight (kg) |
|-------------|-------------|-------------|-------------|-------------|----------------|
| FMJ 500-0.8 | 730 | 140 | 510 | 60 | 108 |
| FMJ 500-1.0 | 730 | 140 | 510 | 60 | 108 |
| FMJ 500-1.3 | 730 | 140 | 510 | 60 | 108 |
| FMJ 500-1.8 | 730 | 140 | 510 | 60 | 108 |
| FMJ 500-2.2 | 728 | 140 | 590 | 60 | 136 |
| FMJ 500-2.7 | 728 | 180 | 590 | 80 | 136 |
| FMJ 500-3.1 | 728 | 180 | 590 | 80 | 136 |
| FMJ 500-3.5 | 728 | 180 | 590 | 80 | 136 |
| FMJ 500-4.4 | 728 | 180 | 590 | 80 | 136 |

N.B: Bowl of hook hangs 70mm above the fork blade



LIFTTRUCK
ATTACHMENTS

Albert Einsteinweg 5
NL-5151 DK
Drunen

Tel: +31(0)73- 640 00 52
www.ltabenlux.com
info@ltabenlux.com